SHIRE

Scan here to find your local dealer

SHIRE 35

30hp @ 3000rpm

RCDII Emission Compliant

Type	4 stroke water cooled diesel
Number of Cylinders	3
Bore x Stroke	82mm x 84mm
Displacement	1331 cc
Max HP (ISO 3046/1)	30 hp @ 3000rpm
Peak Torque	78lb ft / 1600rpm
Combustion	Direct Injection
Electrical System	Starting motor D.C. twin 12V 50 amp & 12V 150 amp alternators
Cooling System	Keel cooled
Lubrication System	Forced lubrication by trochoid pump
Gearbox	PRM 150 Hydraulic
Reduction Ratio	2:1
Dry Weight (inc gearbox)	232 kg

Power Curves / Fuel Consumption

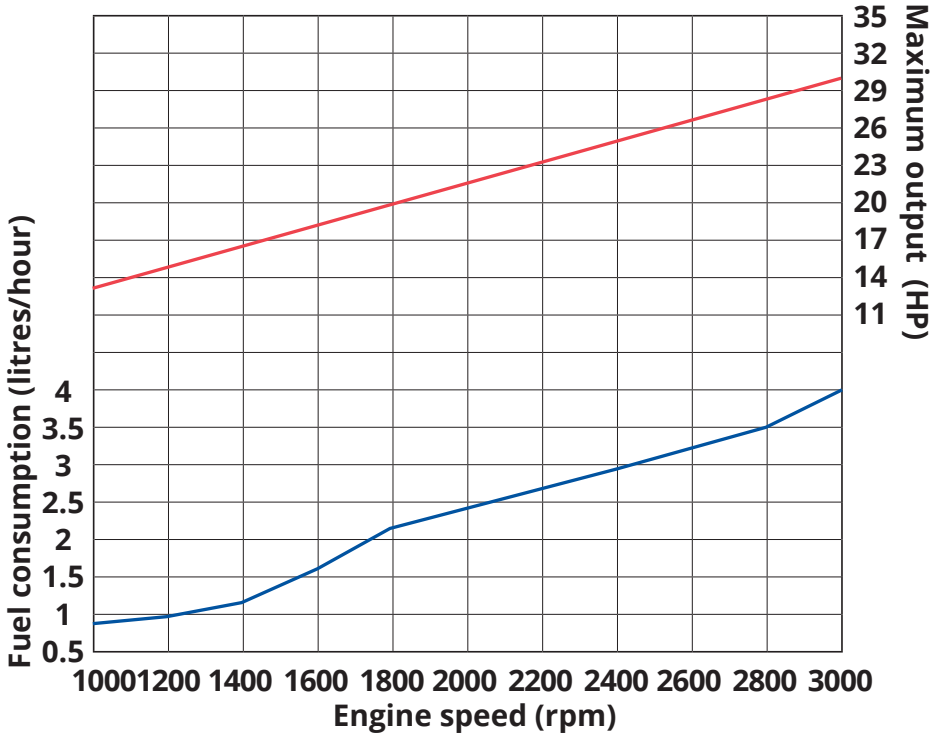

PROUD MEMBER OF BRITISH MARINE LEADING THE INDUSTRY

Specifications and/or prices are subject to change without notice.
Every effort is made to produce sales literature and price lists that are accurate and current.

Shire - Engineered and manufactured in the UK by Barrus

E. P. Barrus Ltd., Glen Way, Launton Road, Bicester, Oxfordshire, OX26 4UR Tel: 01869 363682 www.barrus.co.uk

Powered by BARRUS

Dimensions

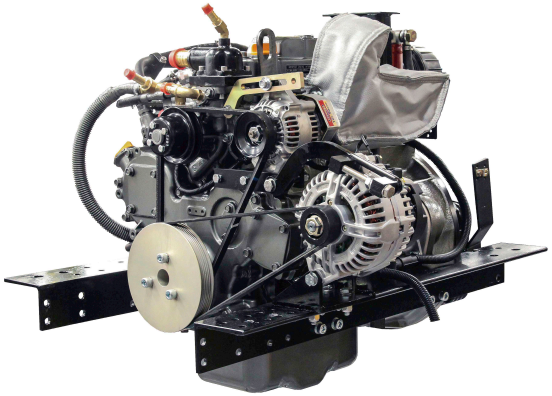

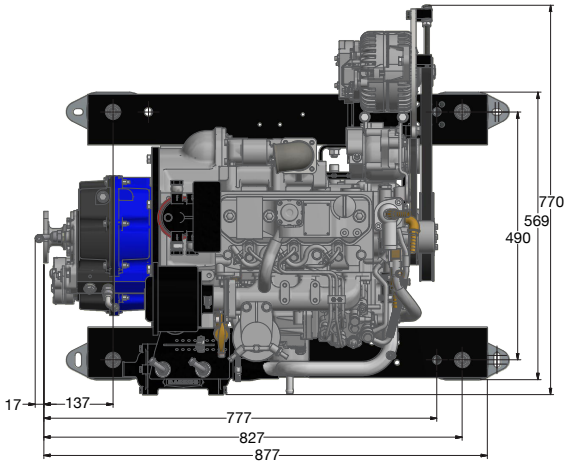

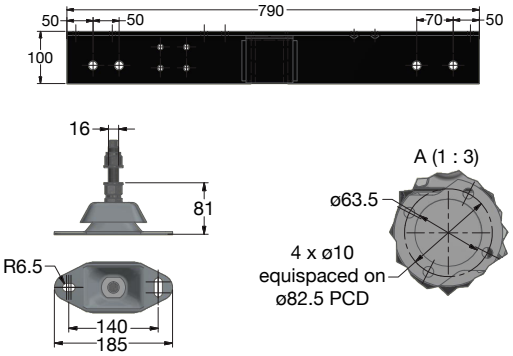

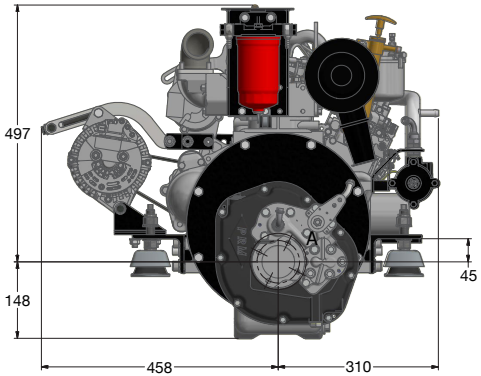

12 volt electric start	Standard
Twin alternators	Standard
Electric stop	Standard
Heavy duty rails & flexible feet	Standard
Morse type cable fitting on speed & gear control	Standard
Centaflex flexible drive coupling	Optional
Dry exhaust flange	Standard
Dry exhaust silencer	Optional
Dry Exhaust Hospital Silencer	Optional
Flexible exhaust pipe with heat shield	Optional
Engine oil extraction pump	Standard
Flexible fuel lines to RCD	Standard
Fuel pre filter and water drain	Standard
Standard control panel	Standard
Deep sump	Standard
350 hour oil change interval	Standard

Features & Options

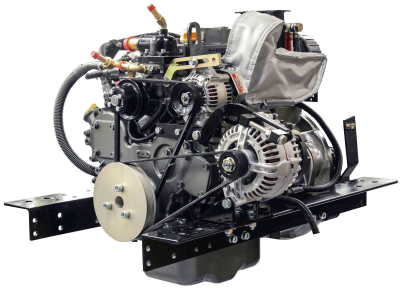

SHIRE 35
30hp @ 3000rpm

Dry manifold

Fuel filter with water drain separator

PRM150 hydraulic gearbox



Single thermostat

Deep sump



Twin alternators